


501-26

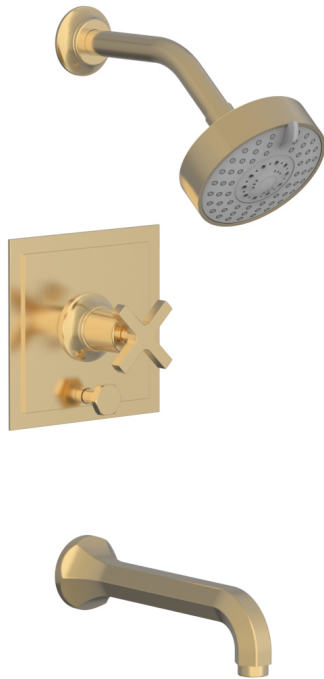


## ■ PRODUCT FEATURES

- Style: Traditional
- Collection: Hex Modern
- Temperature Controlled By Pressure Balance
- Cross Handle
- 
- 

## ■ TECHNICAL DETAILS

Access Hole Diameter: 5"  
Handle Turn Angle: 115°  
Spout Reach: 8 1/4"  
Connection Type: Female 1/2" NPT Connection  
Installation Type: Wall Mounted  
Primary Material: Brass  
Valve Material: Ceramic  
Shower Flow Restriction: 1.8 gpm  
Spout Flow Restriction: Full Flow  
Water Pressure Maximum: 85 PSI  
Water Pressure Minimum: 20 PSI  
Water Pressure Recommended: 60 PSI

## ■ PRODUCT DIMENSIONS

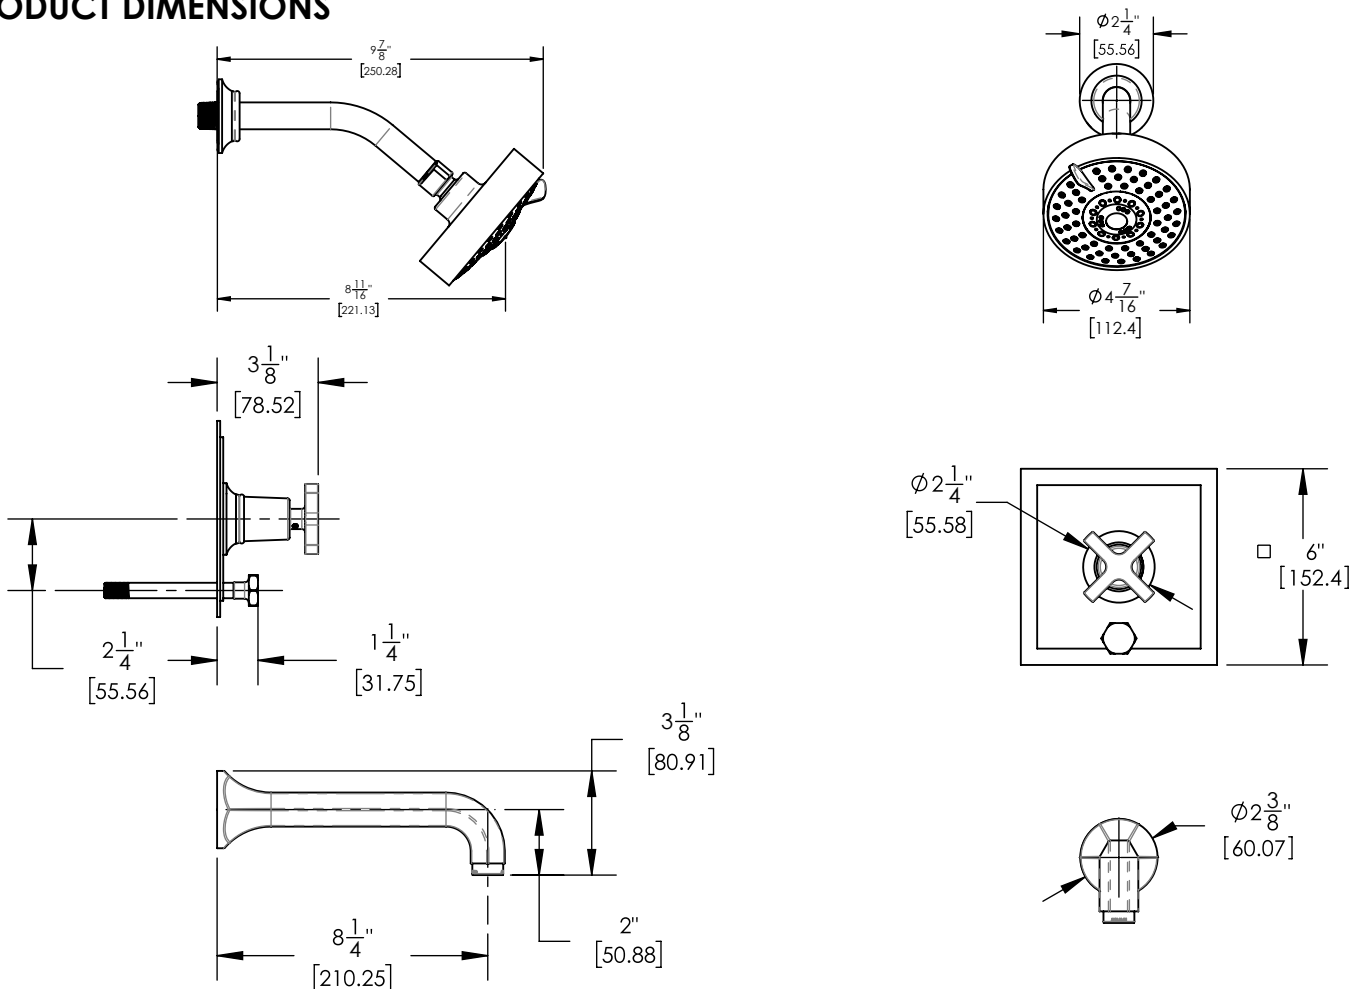

[www.phylrich.com](http://www.phylrich.com)

1261 Logan Avenue, Costa Mesa, California 92626.  
Phone: 714.361.4800 Fax: 714.617.3120



**CODES & STANDARDS**

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC

**WARRANTY**

Mechanical Warranty: 10 Years from date of purchase.  
Finish Warranty: See catalog for further information.

Rev-