220-64




■ PRODUCT FEATURES

- Style: Transitional
- Collection: Works
- Temperature Controlled By Handles
- Cross Handles

.

TECHNICAL DETAILS

Number of Handles: 1 Handle Turn Angle: Quarter Turn Installation Type: Wall Mounted Primary Material: Brass Valve Material: Ceramic Flow Restriction: 1.8 GPM Water Pressure Maximum: 85 PSI Water Pressure Minimum: 20 PSI Water Pressure Recommended: 60 PSI





CV 14 FR-US -1.5 to 2.5 gpm

Flow Regulating Check Valve -Pressure Compensating

Combines check valve and Flow regulator

PRODUCT DIMENSIONS

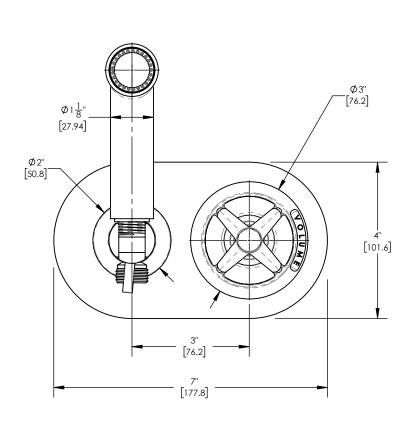

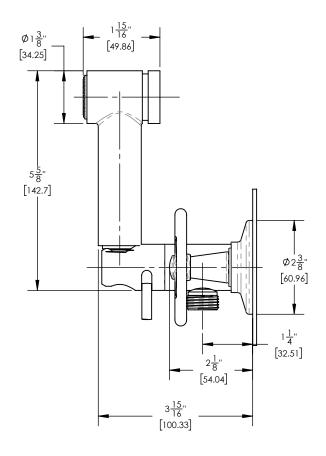

www. phylrich.com

1261 Logan Avenue, Costa Mesa, California 92626. Phone: 714.361.4800 Fax: 714.617.3120

CODES & STANDARDS

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC

WARRANTY