


NOTE(S):  
 1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.  
 2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.  
 3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.  
 4.

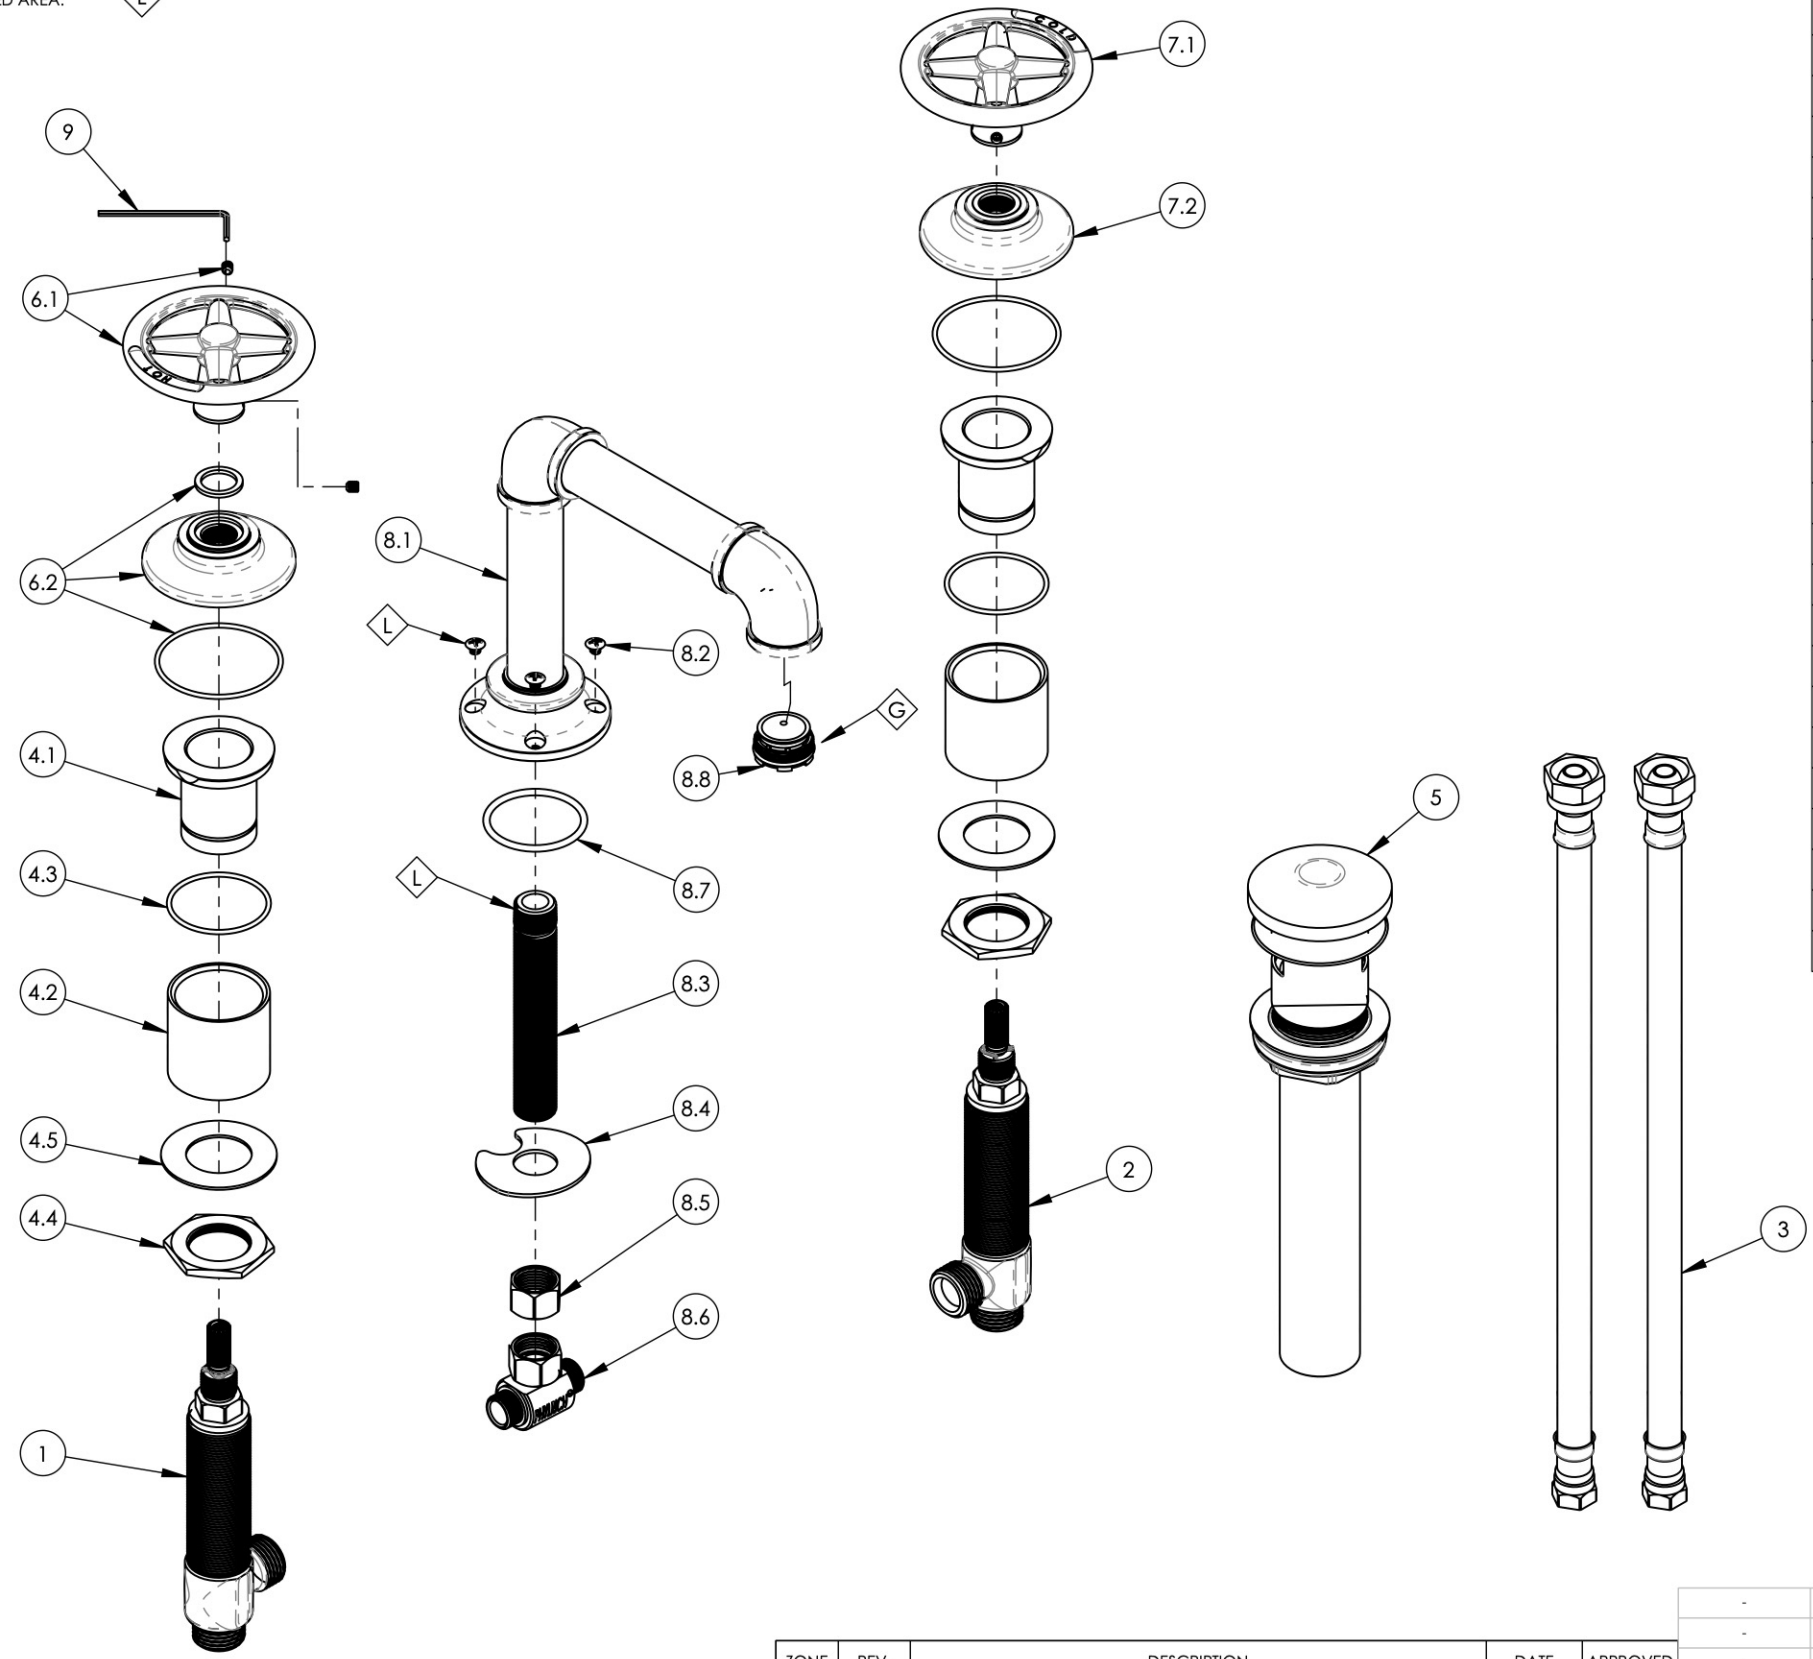

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	1-149	WIDESPREAD VALVE LAV 16PT, HOT, ONLY	1
2	1-150	WIDESPREAD VALVE LAV 16PT, COLD, ONLY	1
3	10982	HOSE, 3/8" COMP. X 1/2" NPSM - 12'L	2
4	2-092	RECESSED MOUNTING KIT FOR WIDESPREAD	2
4.1	10998	SLEEVE MOUNT, WIDESPREAD	1
4.2	92180	EXTENSION SLEEVE, WIDESPREAD	1
4.3	90029	O-RING, 1-5/8"ID X 1-3/4"OD X 1/16"THK, AS-568-029	1
4.4	92251	HEX NUT, 1"-20 THREAD	1
4.5	92252	WASHER, 1-1/32" ID 1-13/16" OD	1
5	3-545/00	BRASS PUSH TYPE DRAIN, W/ OVERFLOW & SMALL PLUG	1
6	3-612/00	HANDLE CROSS HOT, W/ BASE & HARDWARE, WORKS	1
6.1	3-300/00	HANDLE CROSS, HOT, W/ HARDWARE, WORKS	1
6.2	3-299/00	ESCUTCHEON BASE FOR HANDLE, WORKS	1
6.2	3-613/00	HANDLE CROSS COLD, W/ BASE & HARDWARE, WORKS	1
7.1	3-301/00	HANDLE CROSS, COLD, W/ HARDWARE, WORKS	1
7.2	3-299/00	ESCUTCHEON BASE FOR HANDLE, WORKS	1
8	3-624/00	SPOUT LOW, WIDESPREAD, W/ HARDWARE, INDUSTRIAL, WORKS	1
8.1	2-340/00	SPOUT LOW, INDUSTRIAL, BRAZE, WORKS	1
8.2	92431	SCREW, STAINLESS STEEL PHILLIPS HEAD, 8-32 X 1/4"L	4
8.3	10745	THREAD ALL, 3/8"-18 NPSL - 3/8"NPT	1
8.4	92174	WASHER MOUNT WIDESPREAD (3/8")	1
8.5	10746	NUT, 3/8"-18 NPSL	1
8.6	1-112	TEE VALVE, 3/8" NPSM X 3/8" COMPRESSION	1
8.7	90127	O-RING, 1-7/16"ID X 1-5/8"OD X 3/32"THK, AS-568-127	1
8.8	11427	AERATOR, CACHE REG, PINK 1.2 GPM, M24X1.0, NEOPERL # 40.2360.010	1
9	P39001	HEX KEY 5/64, FOR 8-32 SET SCREW	1

ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				
1261 LOGAN AVENUE COSTA MESA, CALIFORNIA 92626 PHONE: 714.361.4800 FAX: 714.617.3120				
<b>PHYLIRICH</b> Defining Luxury Since 1959		<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.		

INTERPRET GEOMETRIC DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5-2009 & ASME Y14.41-2003 STANDARDS. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS ±1/16" DECIMALS X.X: ±.1 X.XX: ±.01 X.XXX: ±.005 ANGULAR ±2°		<b>WIDESPREAD LAV, SPOUT LOW SQUARE SPOUT W/ CROSS, WORKS</b>	
NEXT ASSY USED ON APPLICATION MATERIAL FINISH		NAME DATE DRAWN RAH 6/27/2019 CHECKED MAF 9/9/2019	
<b>DO NOT SCALE DRAWING</b>		SIZE <b>B</b>	ASM/PRT NO. 221-03/00 REV -
		SCALE: 1:3	WEIGHT: lbs. SHEET 1 OF 2