


- NOTE(S):
- PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.
 - APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.
 - APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.
 - APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.
 - SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.

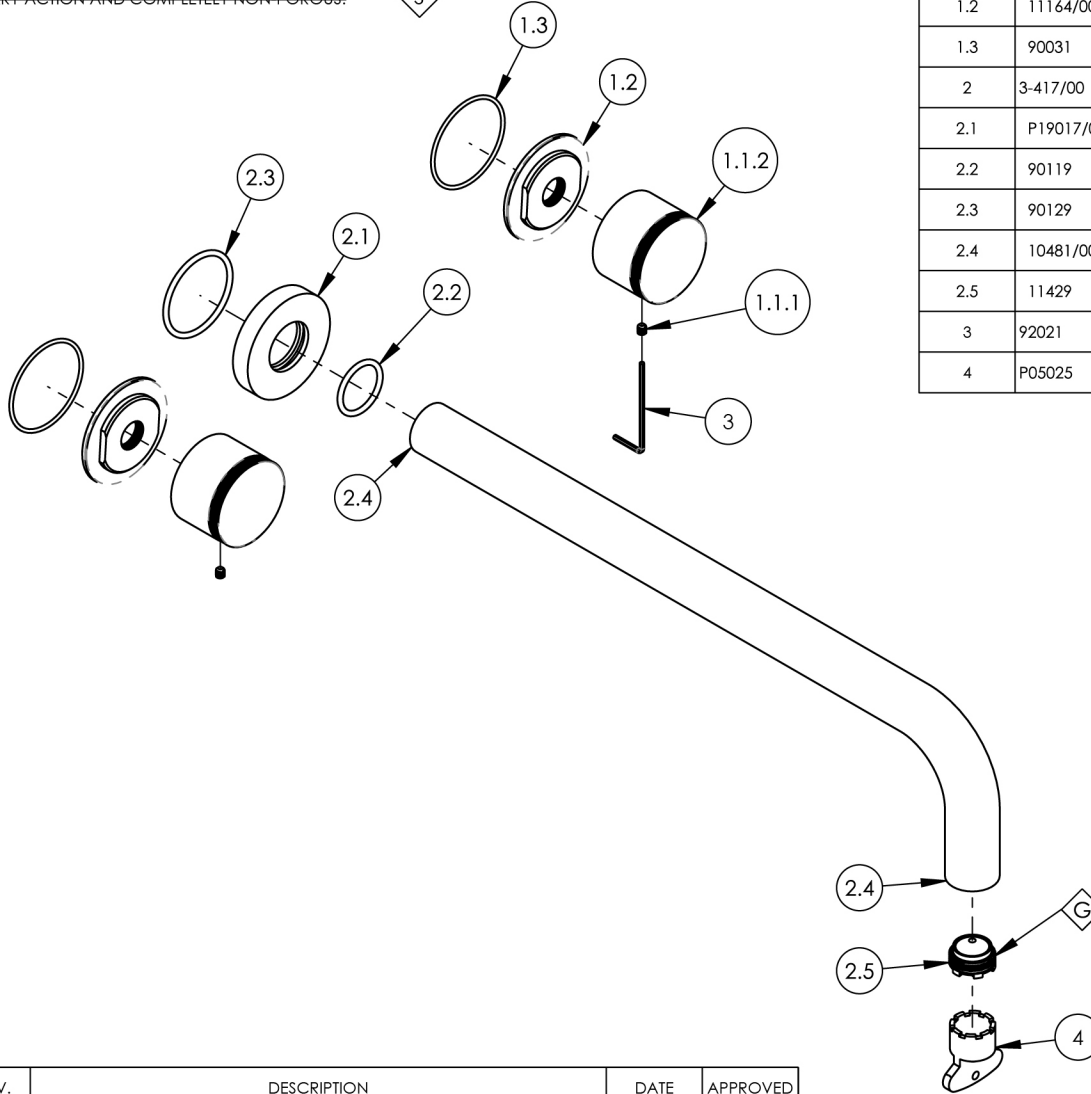

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--|------|
| 1 | 3-329/00 | SUB ASSY. KNURLED HANDLE, BASIC II | 2 |
| 1.1 | 2-247/00 | HANDLE KNURLED, BASIC II | 1 |
| 1.1.1 | 92008 | SET SCREW, CUP POINT 8-32, 3/16" L. | 1 |
| 1.1.2 | 11165/00 | BASE HANDLE, CONTEMP. BASIC II | 1 |
| 1.2 | 11164/00 | ESCUTCHEON BASE, CONTEMP. BASIC II | 1 |
| 1.3 | 90031 | O-RING, 1-3/4"ID X 1/16"THK, AS-568-031 | 1 |
| 2 | 3-417/00 | WALL LAV, SPOUT ONLY, 14" L, BASIC | 1 |
| 2.1 | P19017/00 | ESCUTCHEON, FOR SPOUT | 1 |
| 2.2 | 90119 | O-RING, 15/16"ID X 1-1/8"OD X 3/32"THK, AS-568-119 | 1 |
| 2.3 | 90129 | O-RING, 1-9/16"ID X 3/32THK, AS-568-129 | 1 |
| 2.4 | 10481/00 | 14" WALL LAV SPOUT, BASIC SERIES | 1 |
| 2.5 | 11429 | AERATOR CACHE JR, 1.2GPM, M21.5X1.0, 42.2260.450 | 1 |
| 3 | 92021 | HEX KEY 5/64, FOR 8-32 SET SCREW | 1 |
| 4 | P05025 | AERATOR, BASIC KEY, PLASTIC RED | 1 |

| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
|-----------|------|-------------|------|----------|
| REVISIONS | | | | |

1261 LOGAN AVENUE
COSTA MESA, CALIFORNIA 92626
PHONE: 714.361.4800
FAX: 714.617.3120

PHYLIRICH[®]
Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.
DO NOT SCALE DRAWING

WALL LAV SET, SPOUT 14" W/ KNURLED, BASIC II

| | | |
|------------------|-----------------------------|--------------|
| SIZE A | ASM/PRT NO. 230-11-14/00 | REV - |
| SCALE: 1:3.5 | WEIGHT: lbs. | SHEET 1 OF 2 |