

NOTE(S):
 1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.


2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.

3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.

4. APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.

5. SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.

G
 L
 B
 S

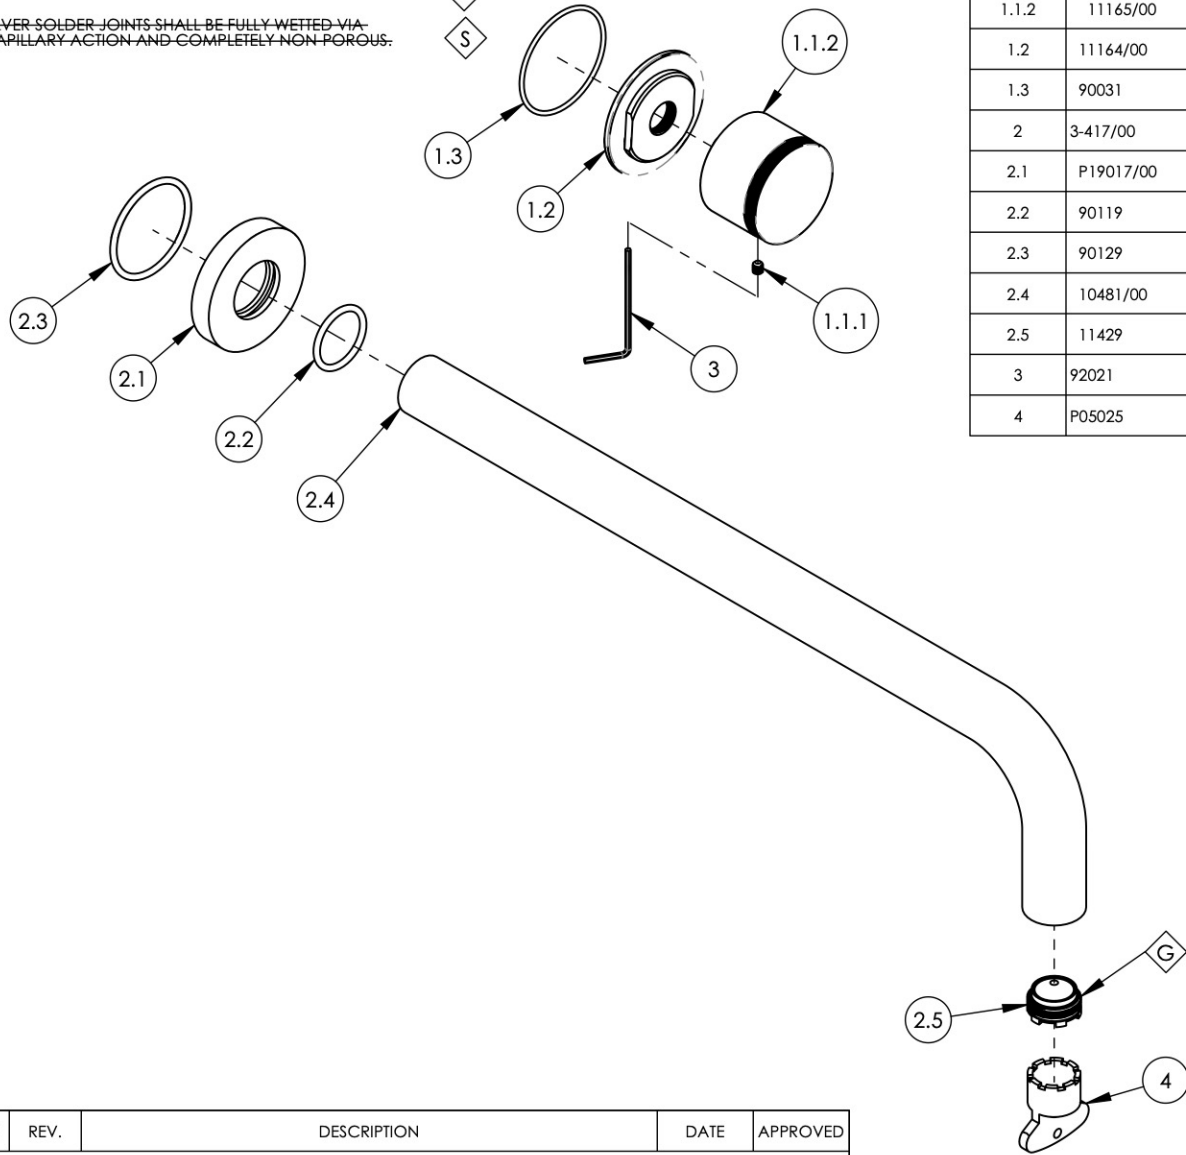

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--|------|
| 1 | 3-329/00 | SUB ASSY. KNURLED HANDLE, BASIC II | 1 |
| 1.1 | 2-247/00 | HANDLE KNURLED, BASIC II | 1 |
| 1.1.1 | 92008 | SET SCREW, CUP POINT 8-32, 3/16" L. | 1 |
| 1.1.2 | 11165/00 | BASE HANDLE, CONTEMP. BASIC II | 1 |
| 1.2 | 11164/00 | ESCUTCHEON BASE, CONTEMP. BASIC II | 1 |
| 1.3 | 90031 | O-RING, 1-3/4"ID X 1/16"THK, AS-568-031 | 1 |
| 2 | 3-417/00 | WALL LAV, SPOUT ONLY, 14" L, BASIC | 1 |
| 2.1 | P19017/00 | ESCUTCHEON, FOR SPOUT | 1 |
| 2.2 | 90119 | O-RING, 15/16"ID X 1-1/8"OD X 3/32"THK, AS-568-119 | 1 |
| 2.3 | 90129 | O-RING, 1-9/16"ID X 3/32THK, AS-568-129 | 1 |
| 2.4 | 10481/00 | 14" WALL LAV SPOUT, BASIC SERIES | 1 |
| 2.5 | 11429 | AERATOR CACHE JR, 1.2GPM, M21.5X1.0, 42.2260.450 | 1 |
| 3 | 92021 | HEX KEY 5/64, FOR 8-32 SET SCREW | 1 |
| 4 | P05025 | AERATOR, BASIC KEY, PLASTIC RED | 1 |

| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
|-----------|------|-------------|------|----------|
| REVISIONS | | | | |

1261 LOGAN AVENUE
 COSTA MESA, CALIFORNIA 92626
 PHONE: 714.361.4800
 FAX: 714.617.3120

PHYLIRICH[®]
 Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.
DO NOT SCALE DRAWING

**WALL LAV SET, SINGLE HANDLE, SPOUT
 14" W/ KNURLED, BASIC II**

| | | |
|------------------|------------------------------------|--------------|
| SIZE A | ASM/PRT NO. 230-18-14/00 | REV - |
| SCALE: 1:3 | WEIGHT: lbs. | SHEET 1 OF 2 |