

NOTE(S):


1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.

2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.

3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.

4. APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.

5. SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.

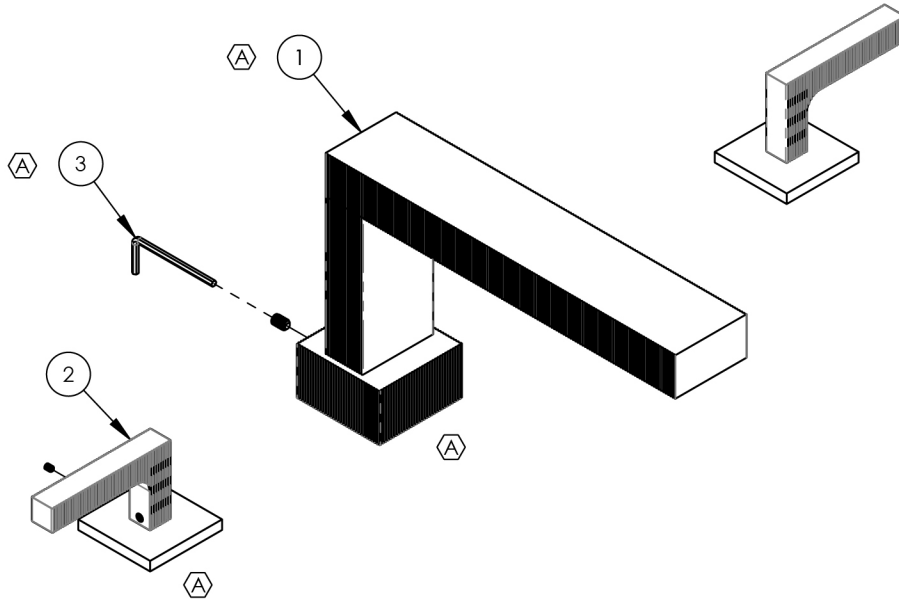

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3-107/00	DECK TUB SPOUT, STRIA, ASSY	1
2	3-109/00	ASSY, HANDLE RIBBED LEVER	2
3	92216	HEX L-KEY 1/8" HEX x 2-5/16"L	1

	A	UPDATED DRAWING	6/7/2024	VA
ALL	A	EXPLODE VIEW, REMOVE SLEEVE MOUNTS & SPOUT ROUGH-IN, ADD CALLOUTS & HEX KEY	6/16/2021	AMM
ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				

1261 LOGAN AVENUE
COSTA MESA, CALIFORNIA 92626
PHONE: 714.361.4800
FAX: 714.617.3120

PHYLIRICH[®]
Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF PHYLIRICH. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH
IS PROHIBITED.
DO NOT SCALE DRAWING

DECK TUB SET, LEVER, STRIA

SIZE A	ASM/PRT NO. 291-41/00	REV A
SCALE: 1:4	WEIGHT: lbs.	SHEET 1 OF 2