

NOTE(S):
1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.

2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.


3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.

4. APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.

5. SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3-885/00	CABINET PULL, 6" C-C, KNURLED, DUSTRIE	1
1.1	12484/00	HEX POST, CABINET PULL, DUSTRIE	2
1.2	12491/00	BAR 6" C-C, CABINET PULL, KNURLED, DUSTRIE	1
1.3	92106	SCREW, PHILLIPS PAN HEAD #6-32 X .5"	2
1.4	12494	POST PLUG, CABINET PULL, DUSTRIE	2
2	2-463	SCREW, SS COMBO TRUSS HEAD KIT 8-32 X 1-1/4" & 1-1/2"	2
2.1	92094	SCREW, SS COMBO TRUSS HEAD 8-32 X 1-1/2"	1
2.2	92103	SCREW, SS COMBO TRUSS HEAD 8-32 X 1-1/4"	1

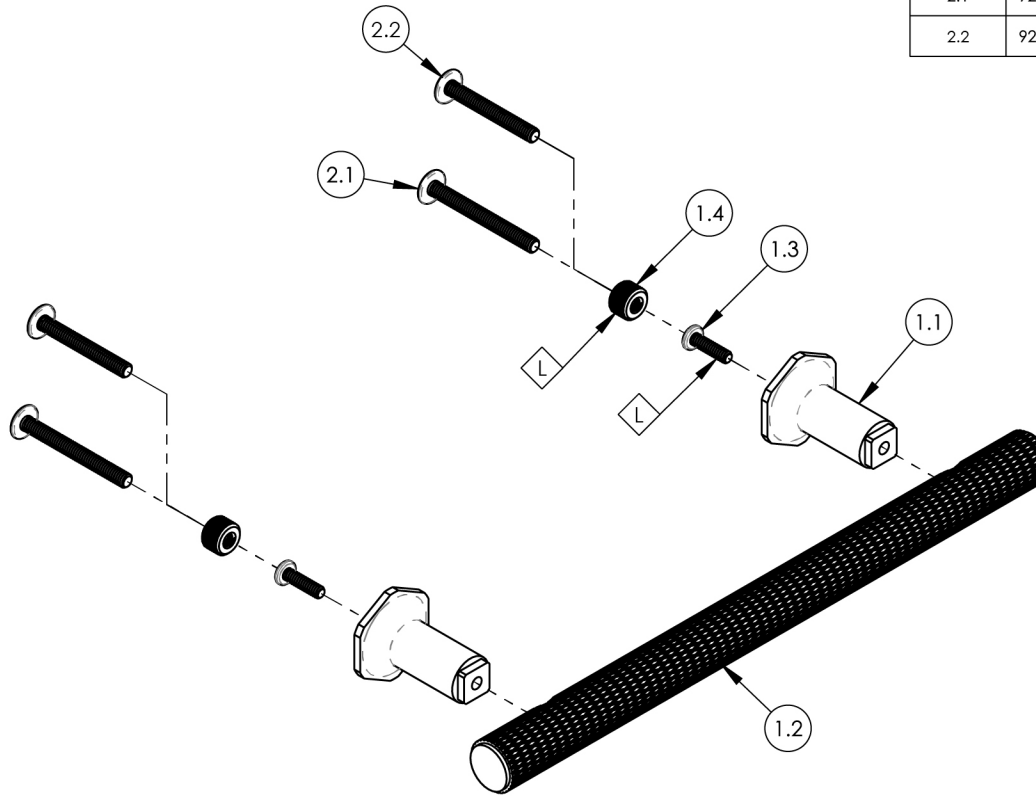

ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				

1261 LOGAN AVENUE
COSTA MESA, CALIFORNIA 92626
PHONE: 714.361.4800
FAX: 714.617.3120

PHYLIRICH
Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.

	-	-	INTERPRET GEOMETRIC DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5-2009 & ASME Y14.41-2003 STANDARDS. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
	-	-			
	-	-			
NEXT ASSY		USED ON			
	APPLICATION		FRACTIONS ±1/16"	DECIMALS X.X: ±.1 X.XX: ±.01 X.XXX: ±.005	ANGULAR ±2°
	MATERIAL			NAME	DATE
	FINISH		DRAWN	LLO	5/7/2025
	DO NOT SCALE DRAWING		CHECKED		

CABINET PULL, 6" C-C, KNURLED, DUSTRIE

SIZE **A** ASM/PRT NO. 371-91-06/00 REV -

SCALE: 1:2 WEIGHT: lbs. SHEET 1 OF 2