PHYLRICH®

Defining Luxury Since 1959

Thermostatic Valve w/Volume Control or Diverter



TECHNICAL DETAILS

ADA Compliance: No Access Hole: 3" x 8" Number of Handles: Two Handle Spread: 5" Top Handle Turn Angle: Quarter Turn Bottom Handle Turn Angle: 115-118° Installation Type: Wall Mounted Primary Material: Brass Valve Material: Ceramic Flow Rate: 6.5 GPM Flow Restriction: 1.8 GPM per function Water Pressure Maximum: 85 PSI Water Pressure Minimum: 20 PSI Water Pressure Recommended: 60 PSI

PRODUCT FEATURES

- Style: Contemporary
- Collection: Stria
- Temperature Controlled By Thermostatic




4-127


ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC, Watersense 61 Sect. 9, State of MA.

WARRANTY

Mechanical Warranty: 10 Years from date of purchase. Finish Warranty: See catalog for further information.

CODES & STANDARDS

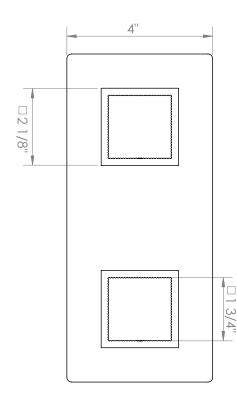

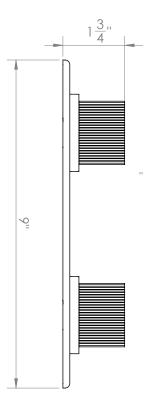

Cube Handles