


- NOTE(S):
 1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.
 2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.
 3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.
 4. APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.
 5. SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	11933/00	TRIM PLATE, 3 HOLE, TRANSITION	1
2	3-442/00	ASSY, TUBULAR CROSS HANDLE, BASIC	3
2.1	3-439/00	ASSY. CROSS HANDLE TUBULAR, BASIC SERIES	1
2.2	P02035_2/00	ESCUTCHEON, CONTEMPORARY	1
2.3	P02035_1/00	HUB ESCUTCHEON, CONTEMPORARY TOP	1
3	11087	SLEEVE FOR PB-THERM PLATE	3
4	90537	1/16" TAPE FOR WALL PLATE	1
5	92021	HEX KEY 5/64, FOR 8-32 SET SCREW	1

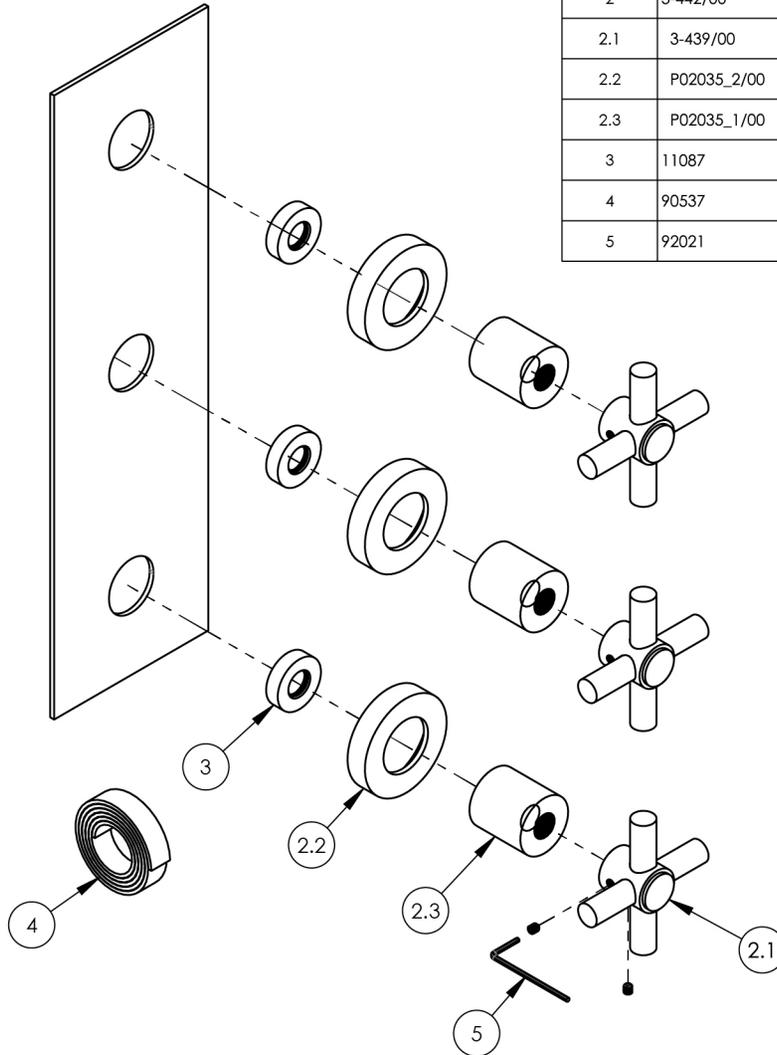

B3, B4	A	DESCRIPTION	DATE	APPROVED
B3, B4	A	UPDATED ASSEMBLY FOR BETTER CLARITY, ADDED TAPE FOR PLATE, ADDED HEX KEY	3/4/2026	LLO
REVISIONS				

1261 LOGAN AVENUE
 COSTA MESA, CALIFORNIA 92626
 PHONE: 714.361.4800
 FAX: 714.617.3120

PHYLIRICH[®]
 Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.

APPLICATION	FRACCTIONS	DECIMALS	ANGULAR
NEXT ASSY	±1/16"	X.X: ±.1	±2°
USED ON		X.XX: ±.01	
MATERIAL		X.XXX: ±.005	
FINISH			
DO NOT SCALE DRAWING			

INTERPRET GEOMETRIC DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5-2009 & ASME Y14.41-2003 STANDARDS, UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

THERMOSTATIC VALVE W/TWO VOLUME CONTROL, TUBULAR CROSS HANDLE, BASIC

SIZE **A** ASM/PRT NO. **4-351/00** REV **A**

SCALE: 1:8 WEIGHT: lbs. SHEET 1 OF 2