Defining Luxury Since 1959

# Thermostatic Valve w/Volume Control or Diverter

4-392




# **TECHNICAL DETAILS**

ADA Compliance: Yes
Access Hole: 3" x 8"
Number of Handles: Two
Handle Spread: 5"
Top Handle Turn Angle: Quarter Turn
Bottom Handle Turn Angle: 115-118°
Installation Type: Wall Mounted
Primary Material: Brass
Valve Material: Ceramic
Flow Rate: 6.5 GPM
Flow Restriction: 1.8 GPM per function
Water Pressure Maximum: 85 PSI
Water Pressure Minimum: 20 PSI

Water Pressure Recommended: 60 PSI

### **PRODUCT FEATURES**

- Style: Traditional
- Collection: Le Verre & La Crosse
- Temperature Controlled By Thermostatic
- Cross Handles

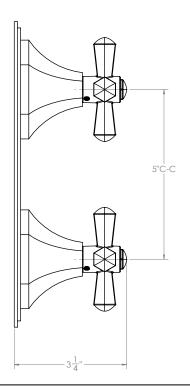

### **CODES & STANDARDS**



ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC, Watersense 61 Sect. 9, State of MA.

#### WARRANTY

Mechanical Warranty: 10 Years from date of purchase. Finish Warranty: See catalog for further information.

