

501-55-02



PRODUCT FEATURES

- Style: Traditional
- Collection: Hex Modern
- Temperature Controlled by Handle
- Integrated Diverter
- Low "Square" Spout
- Lever Handle

TECHNICAL DETAILS

Spout Flow Rate: Full Flow


Spout Reach: 9 1/16"

Water Pressure Maximum: 85 PSI

Water Pressure Minimum: 20 PSI

Water Pressure Recommended: 60 PSI

PRODUCT DIMENSIONS

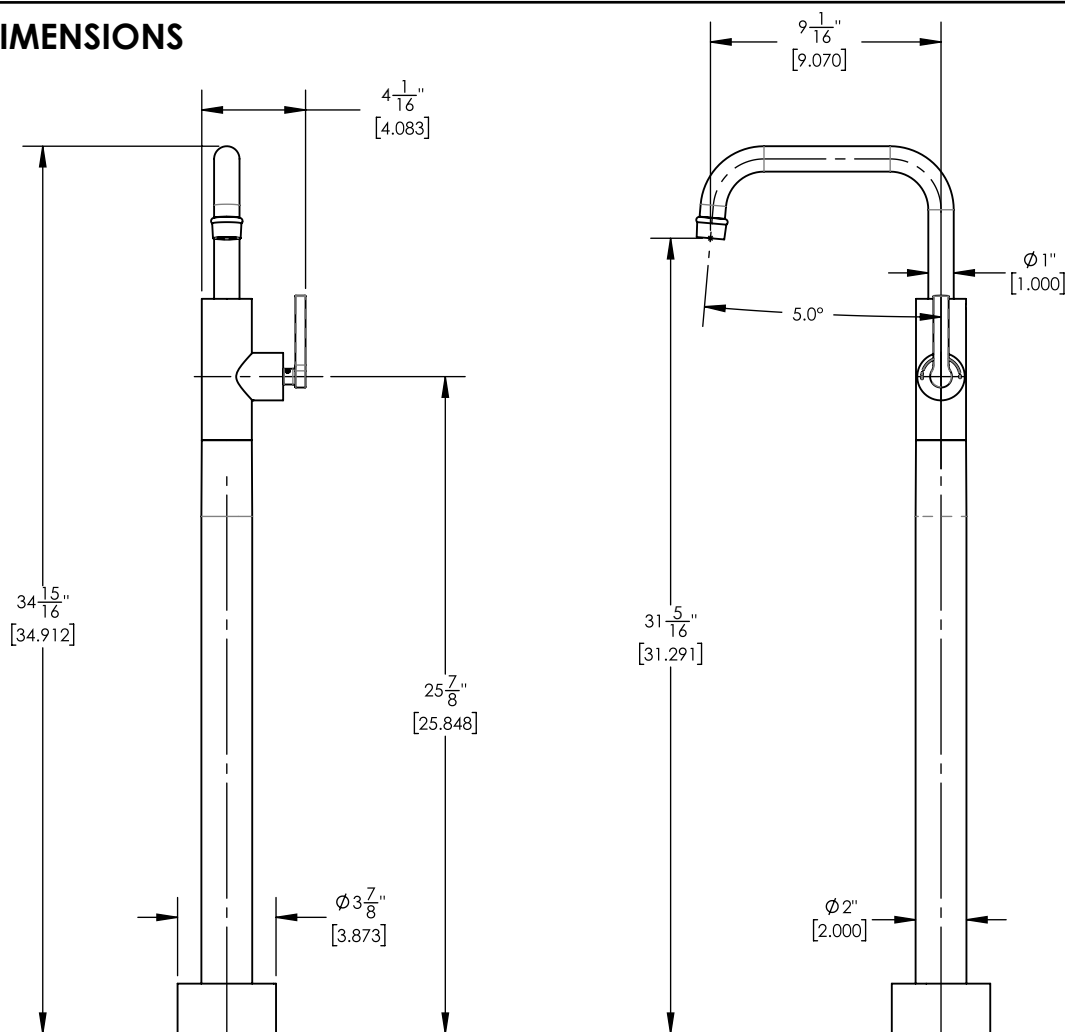

www.phylrich.com

1261 Logan Avenue, Costa Mesa, California 92626.
Phone: 714.361.4800 Fax: 714.617.3120



CODES & STANDARDS

ASME A112.181/CSA B1251, ASME 112.18.2/CSA B125.2, ANSI NSF, CEC

WARRANTY

Mechanical Warranty: 10 Years from date of purchase.
Finish Warranty: See catalog for further information.

Rev-