


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3-584/00	ASSY, BLADE HANDLE, ROND	2
1.1	11749/00	ESCUTCHEON, HANDLE, ROND	1
1.2	11748/00	HANDLE, BLADE, ROND	1
1.3	92005	SET SCREW, CUP PT 6-32 UNC THREAD 3/16"L	1
1.4	92176	WEAR WASHER	2
1.5	92177	RETAINING RING, 7/16" SHAFT	1
2	3-591/00	ASSY, DECK TUB SPOUT, ROND	1
2.1	11758/00	ESCUTCHEON, DECK TUB SPOUT, ROND	1
2.2	92158	DOWEL PIN, 1/8" X 3/8"L	2
2.3	92173	SET SCREW, CUP PT, 1/4"-20 X 3/8" L	1
2.4	11220	SPUD SCREW, 1/2"-NPSM CONNECTOR	1
2.5	90137	O-RING, 2-1/16"ID X 3/32"THK., AS-568-137	1
2.6	11759/00	SPOUT, DECK TUB, ROND	1
2.7	90017	O-RING, 11/16"ID X 13/16"OD X 1/16"THK., AS-568-017	1
2.8	P05051	AERATOR, CACHE COINED SLOT M24X1.0 FULL FLOW	1

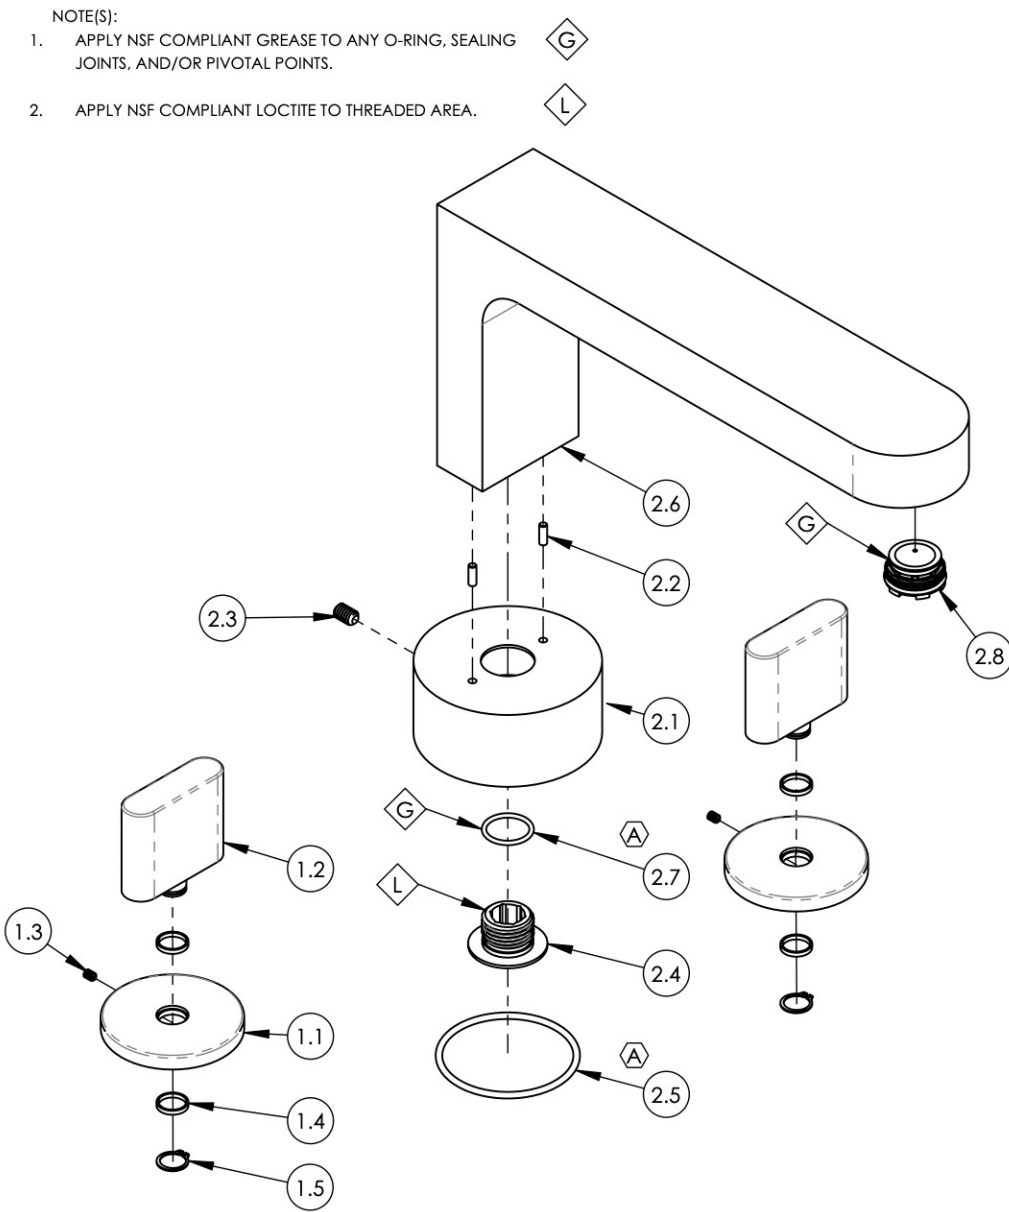

- NOTE(S):
1. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.
 2. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.

ALL	REV.	DESCRIPTION	DATE	APPROVED
A	A	UPDATE TEMPLATE, O-RINGS, ADD CALL OUTS	6/5/2020	AMM
REVISIONS				

1261 LOGAN AVENUE
COSTA MESA, CALIFORNIA 92626
PHONE: 714.361.4800
FAX: 714.617.3120

PHYL RICH[®]
Defining Luxury Since 1959

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYL RICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYL RICH IS PROHIBITED.

-	-	INTERPRET GEOMETRIC DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5-2009 & ASME Y14.41-2003 STANDARDS, UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
NEXT ASSY	USED ON	FRACTIONS ±1/16"	DECIMALS X.X: ±.1 X.XX: ±.01 X.XXX: ±.005	ANGULAR ±2°
APPLICATION		MATERIAL	NAME	DATE
FINISH		DRAWN	RAH	11/29/2017
DO NOT SCALE DRAWING		CHECKED		

ASSY, DECK TUB SET, BLADE HANDLES, ROND

SIZE **A** ASM/PRT NO. **183-40/00** REV **A**

SCALE: 1:3 WEIGHT: lbs. SHEET 1 OF 2